


Control incluido de serie

 Producto certificado por: **CE**


CARACTERÍSTICAS

Modelo conjunto	KLK-26(09)-MN8S3	KLK-35(12)-MN8S3	KLK-52(18)-MN8S3	KLK-71(24)-MN8S3
Capacidad frigorífica	2,64 kW	3,52 kW	5,28 kW	7,03 kW
Consumo frío	2,93 kW	3,81 kW	5,57 kW	7,33 kW
Capacidad calorífica	800 W	1.320 W	1.550 W	2.600 W
Consumo calor	930W	1.190 W	1.570 W	2.400 W
SERR	7.0- A++	6.5 - A++	7.2-A++	6.1-A++
SCOP	4.1-A+	4.1-A+	4.0-A+	4.0-A+
Unidad Exterior	KLKO-26(09)-MN8S3	KLKO-35(12)-MN8S3	KLKO-52(18)-MN8S3	KLKO-71(24)-MN8S3
Alimentación	220-240 V/ 1/ 50 Hz	220-240 V/ 1/ 50 Hz	220-240 V/ 1/ 50 Hz	220-240 V/ 1/ 50 Hz
Presión sonora (ext.)	56 dB(A)	56 dB(A)	56 dB(A)	59 dB(A)
Carga fábrica	0,47 kg	0,52 kg	1,08 kg	1,42 kg
Longitud máx. tuberías total/Vertical	25 m /10 m	25 m /10 m	30 m /20 m	50 m/25m
Tipo refrigerante	R32	R32	R32	R32
Tª ext. calefacción mín/máx.	-20/24	-20/24	-20/24	-20/24
Tª ext. refrigeración mín/máx.	-15/50	-15/50	-15/50	-15/50
Cableado alimentación (ext.)	(2+T)x1,50 mm2	(2+T)x1,50 mm2	(2+T)x1,50 mm2	(2+T)x2,50 mm2
Cable interconexión	(4+T)x1,50 mm2	(4+T)x1,50 mm2	(4+T)x1,50 mm2	(4+T)x2,50 mm2
Tipo refrigerante	R32	R32	R32	R32
Unidad Interior	KLKIM-26(09)-MN8S3	KLKIM-35(12)-MN8S3	KLKIM-52(18)-MN8S3	KLKIM-71(24)-MN8S3
Caudal de aire (al/me/bj)	434/333/259 m3/h	530/430/310 m3/h	840/680/540 m3/h	980/817/662 m3/h
Presión Sonora (al/me/bj)	37/32/25/21.5 dB(A)	39.5/35.5/25/21.5 dB(A)	42.5/36/26/20 dB(A)	45/40.5/36 dB(A)
Potencia acústica	53	54	56	60
Tª int calefacción mín/máx.	0/30	0/30	0/30	0/30
Tª int refrigeración mín/máx.	17/32	17/32	17/32	17/32
Código SAP (ext/int)	15200001/ 15200000	15200003/ 15200002	15200005/ 15200004	15200007/ 15200006


NOTAS:

(1) Los datos y especificaciones presentes en esta ficha pueden variar sin previo aviso.

(2) Las imágenes de esta ficha son de carácter orientativo, pudiendo ser diferentes a la máquina final.



DIMENSIONES Y PESO UNIDAD INTERIOR

Modelo	Peso	A	B	C
KLKIM-26(09)-MN8S3	6,70 kg	715 mm	285 mm	194 mm
KLKIM-35(12)-MN8S3	7,30 kg	805 mm	285 mm	194 mm
KLKIM-52(18)-MN8S3	10 kg	957 mm	302 mm	213 mm
KLKIM-71(24)-MN8S3	12,30 kg	1.040 mm	327 mm	220 mm

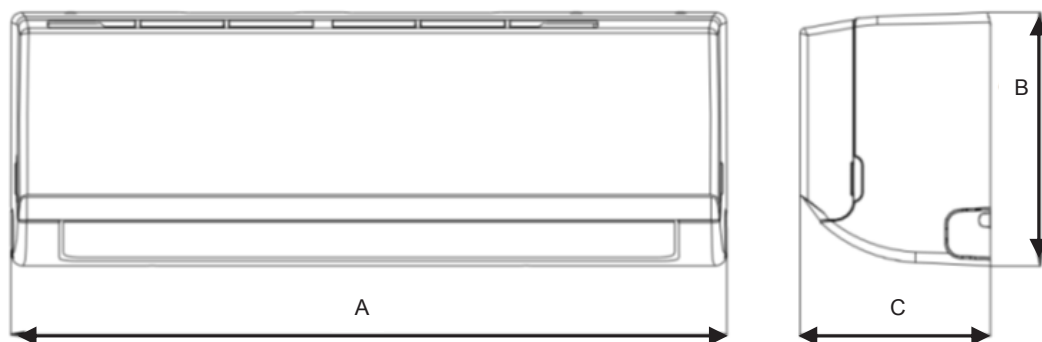

DIMENSIONES Y PESO UNIDAD EXTERIOR

Modelo	Peso	A	B	C
KLKO-26(09)-MN8S3	21 kg	720 mm	495 mm	270 mm
KLKO-35(12)-MN8S3	21 kg	720 mm	495 mm	270 mm
KLKO-52(18)-MN8S3	32,70 kg	805 mm	554 mm	330 mm
KLKO-71(24)-MN8S3	42,90 kg	890 mm	673 mm	342 mm

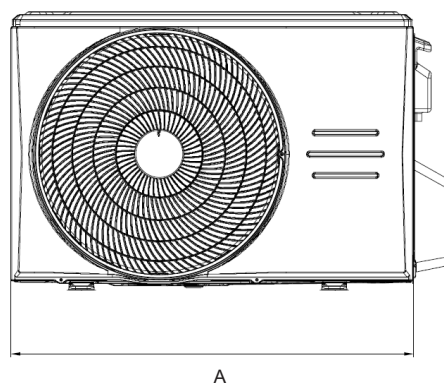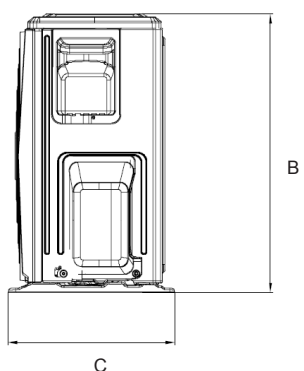

INSTALACIÓN

